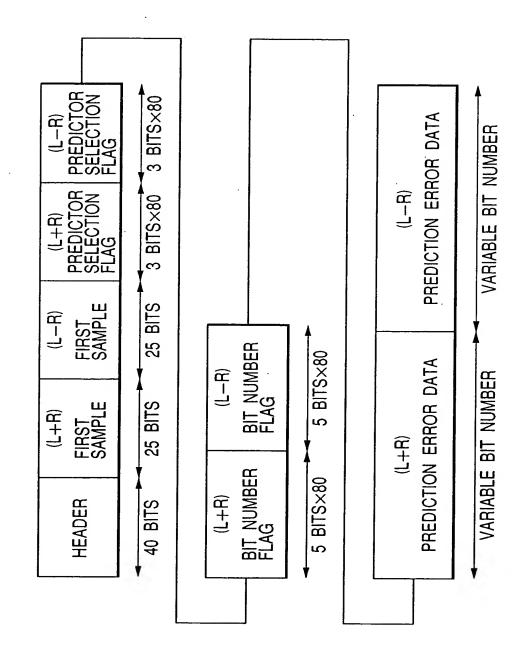
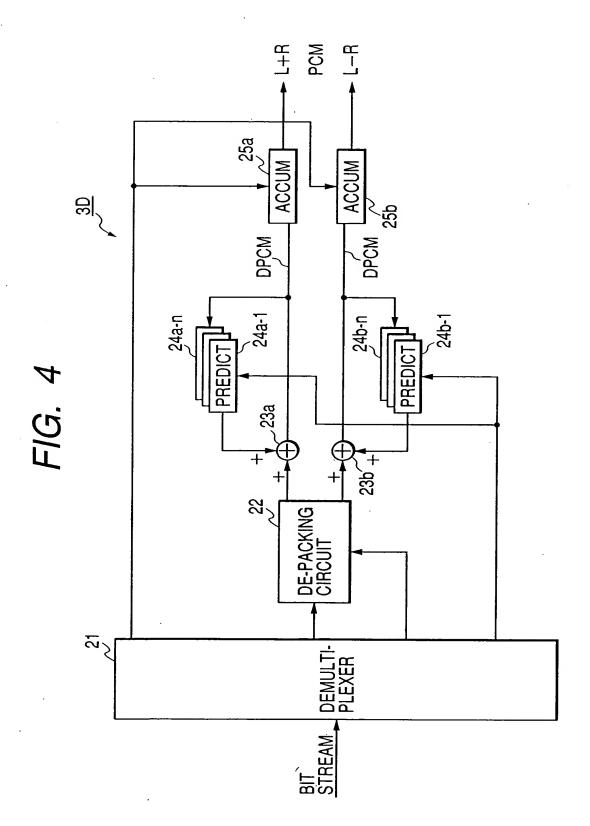
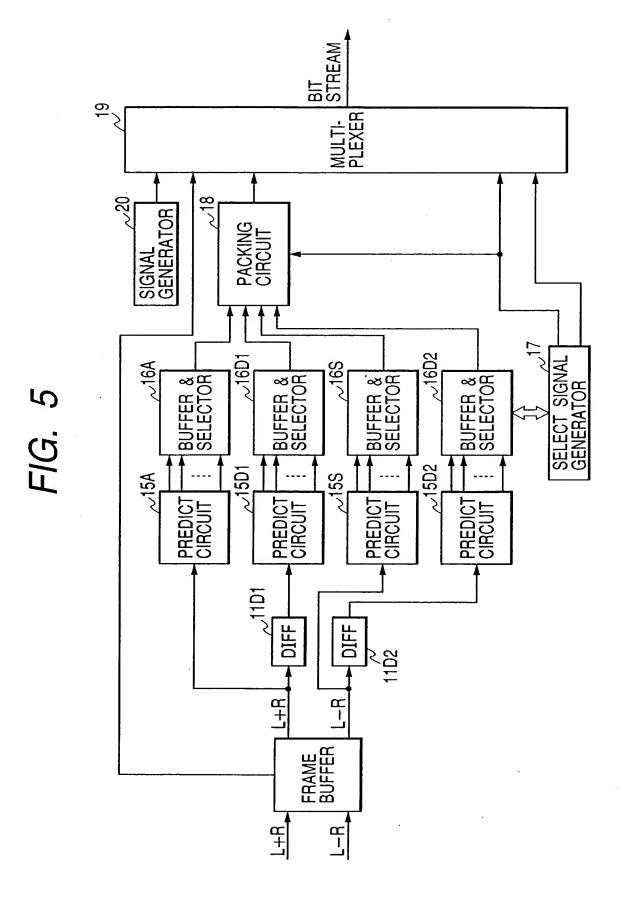


FIG. 3







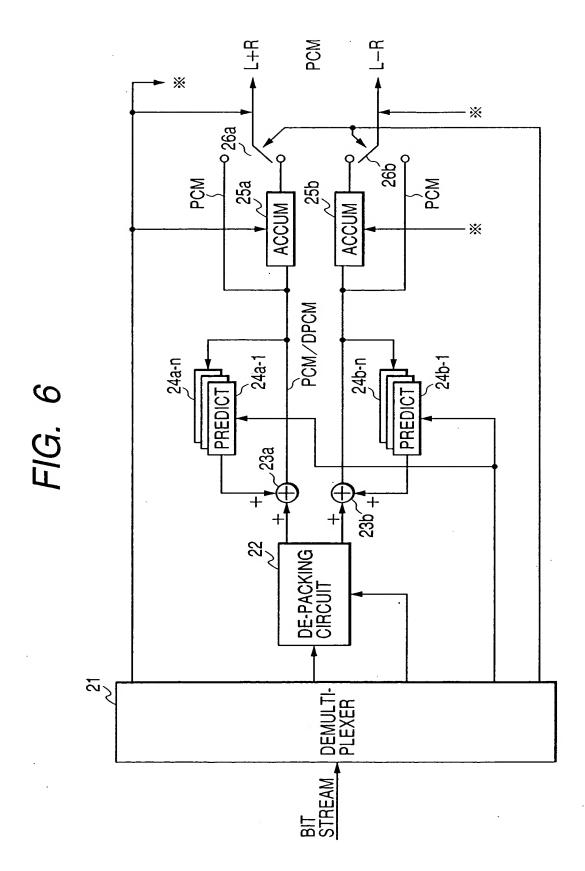
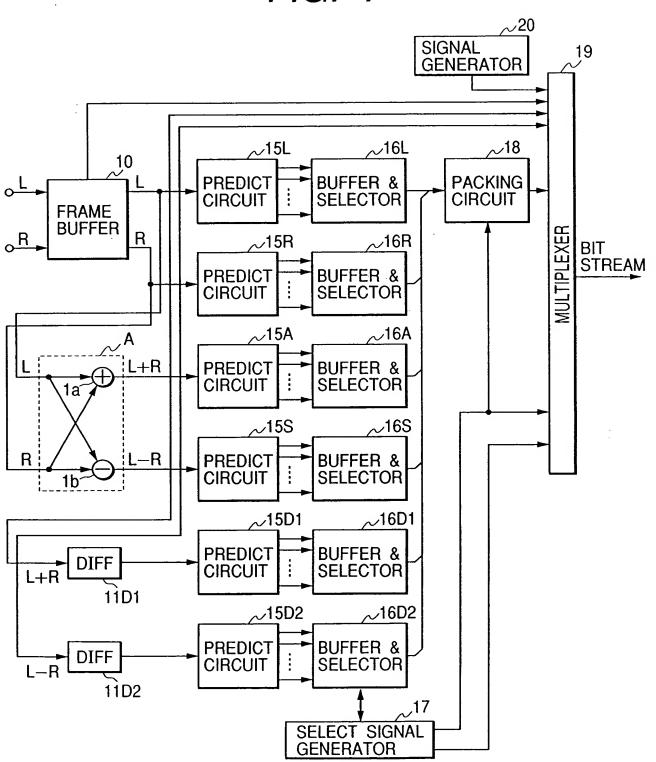


FIG. 7



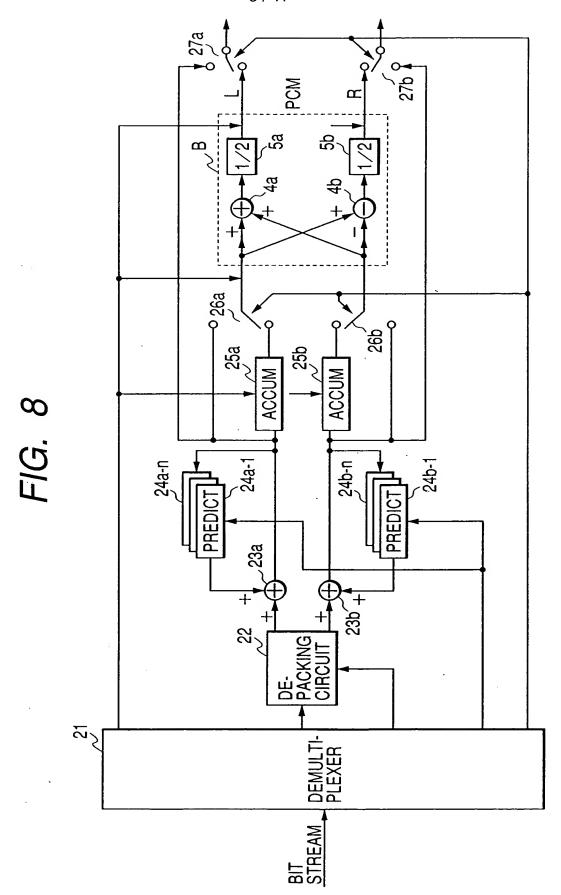


FIG. 9

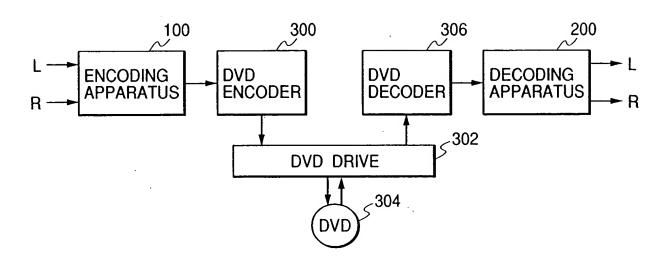
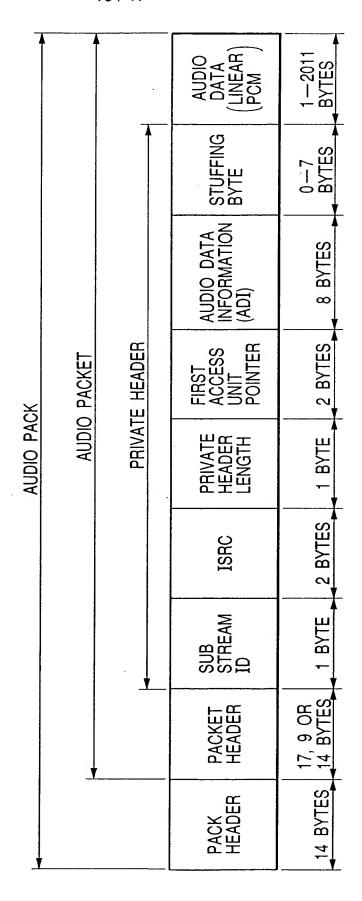


FIG. 10

AUDIO PACK

2048 BYTES						
PACK START (4)	SCR (6)	MUX RATE (3)	STUFFING (1)	USER DATA (PACKET) (2034)		
	PACK HE	ADER (14				

FIG. 11



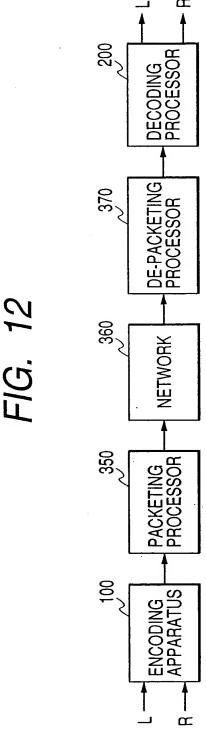


FIG. 13

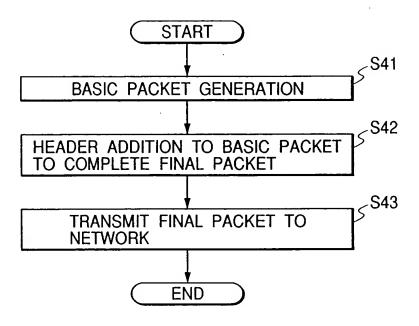
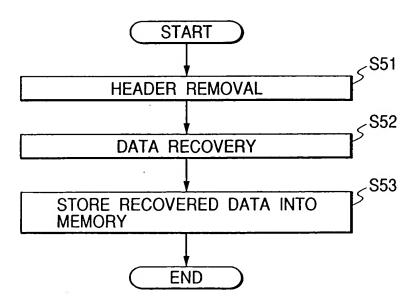


FIG. 14



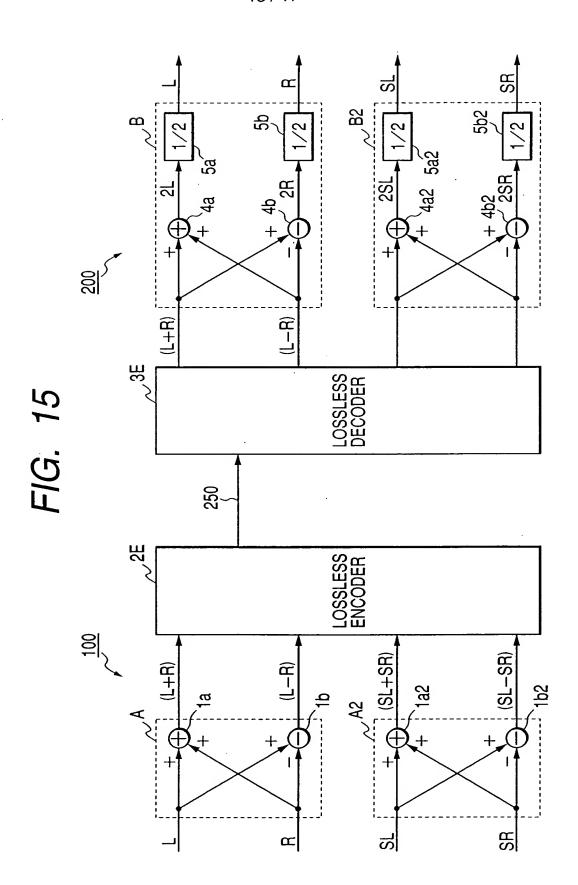


FIG. 16

HEADER	(L+R) (L-R)	(SL+SR) (SL-SR)

FIG. 18

HEADER	(I + D) (I D)	C SI SB IEE
HEADER	(L+R) (L-R)	C, SL, SR, LFE

